


## Lithium

# Thin Cell CF042726

### Specification

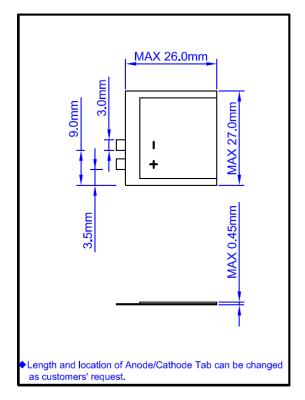


Nominal Voltage		3. 0V
Dimensions (Max.)	Length	26. Omm
	Width	27. Omm
	Thickness	0. 45mm
Ref. Weight		0.5g
Nominal Capacity(Ave.)		11mAh
Continuous Standard Load		0. 25mA
Cut off Voltage		2. 0V
Maximum Continuous Discharge Current		4mA
Maximum Pulse Discharge Current		6mA
Operating Temperature		−20~60°C

#### Discharge Characteristics

### 3.5 3.0 Current: 1mA-cont 2.5 2.0 1.5 1.0 0 3.0 6.0 9.0 12.0 15.0 Duration(hour)

#### Discharge Characteristics



Tel: +86-752-2652968 Fax: +86-752-2652186

#### WARNING:

■ Do not charge, disassemble, heat above 100°C or incinerate.

E-ail: sales@huiderui.com

- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.