


Huiderui


Lithium

Cell Type CRV3


Specification

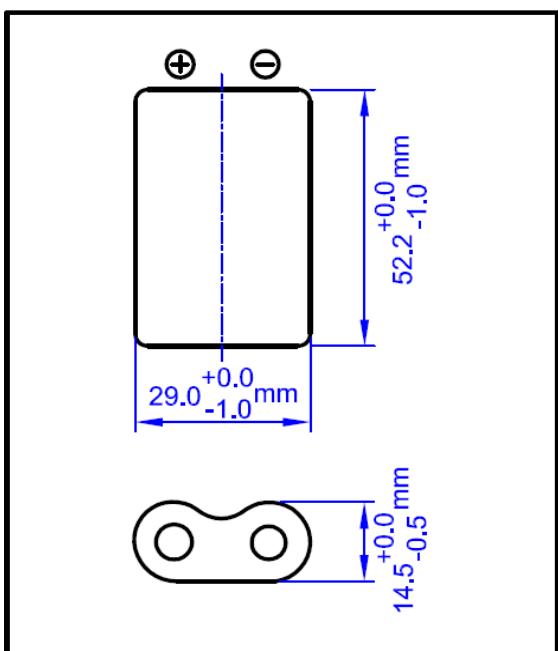

Discharge Characteristics

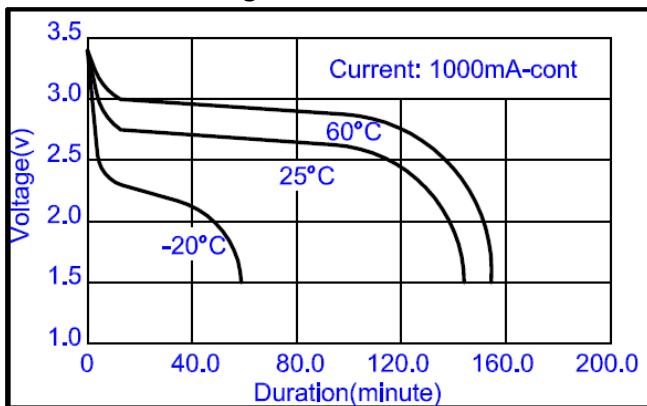


Pulse Discharge Characteristics

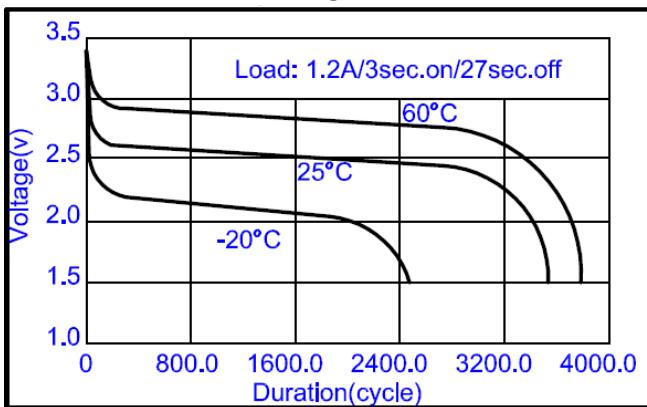


Nominal Voltage		3.0V
Dimensions (Max.)	Diameter	29. 0mm
	Width	14. 5mm
	Height	52. 2mm
Ref. Weight		35. 0g
Nominal Capacity (Ave.)		3200mAh
Continuous Standard Load		20mA
Cut off Voltage		2. 0V
Maximum Continuous Discharge Current		1500mA
Maximum Pulse Discharge Current		3500mA
Operating Temperature		-40~+70°C

Discharge Characteristics

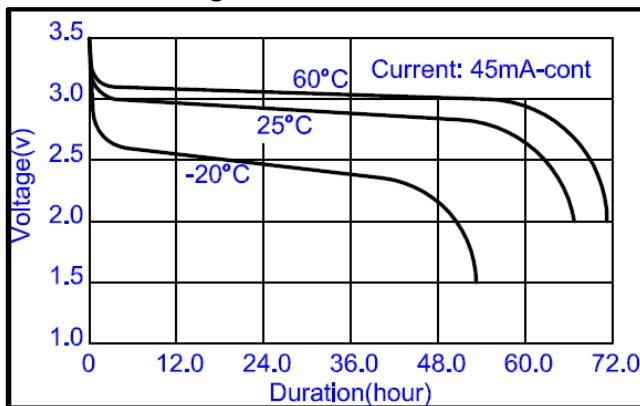

Discharge Characteristics

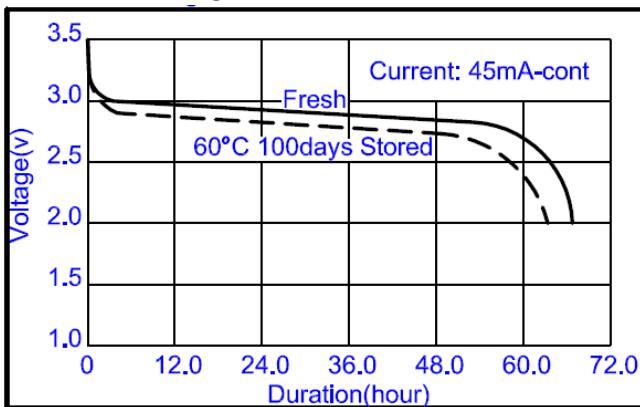

* Please consult Huiderui for use below and above -20°C to +60°C.

WARNING:

- Do not charge, disassemble, heat above 100°C or incinerate.
- Do not mix fresh batteries and used batteries or other types of battery together.
- Do not short circuit.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Huiderui for the latest information.