




# FR14505 / FR6 / AA Cylindrical Primary Lithium



Chemical system		Lithium/Iron Disulfide
Nominal voltage		1.5 V
Dimension	Diameter	14.2(Typical)/14.4(Max)
	Over all Height	50.3(Typical)/50.5 (Max)
Cell weight		16.0 g
Nominal discharge current		35 mA
End voltage of discharge		0.8 V
Nominal Capacity		2900mAh(Ave.)
Operating temperature		-40°C ~ 60°C
Storage temperature		-10°C ~ 35°C
Storage life		10years@21°C

## Typical discharge curve

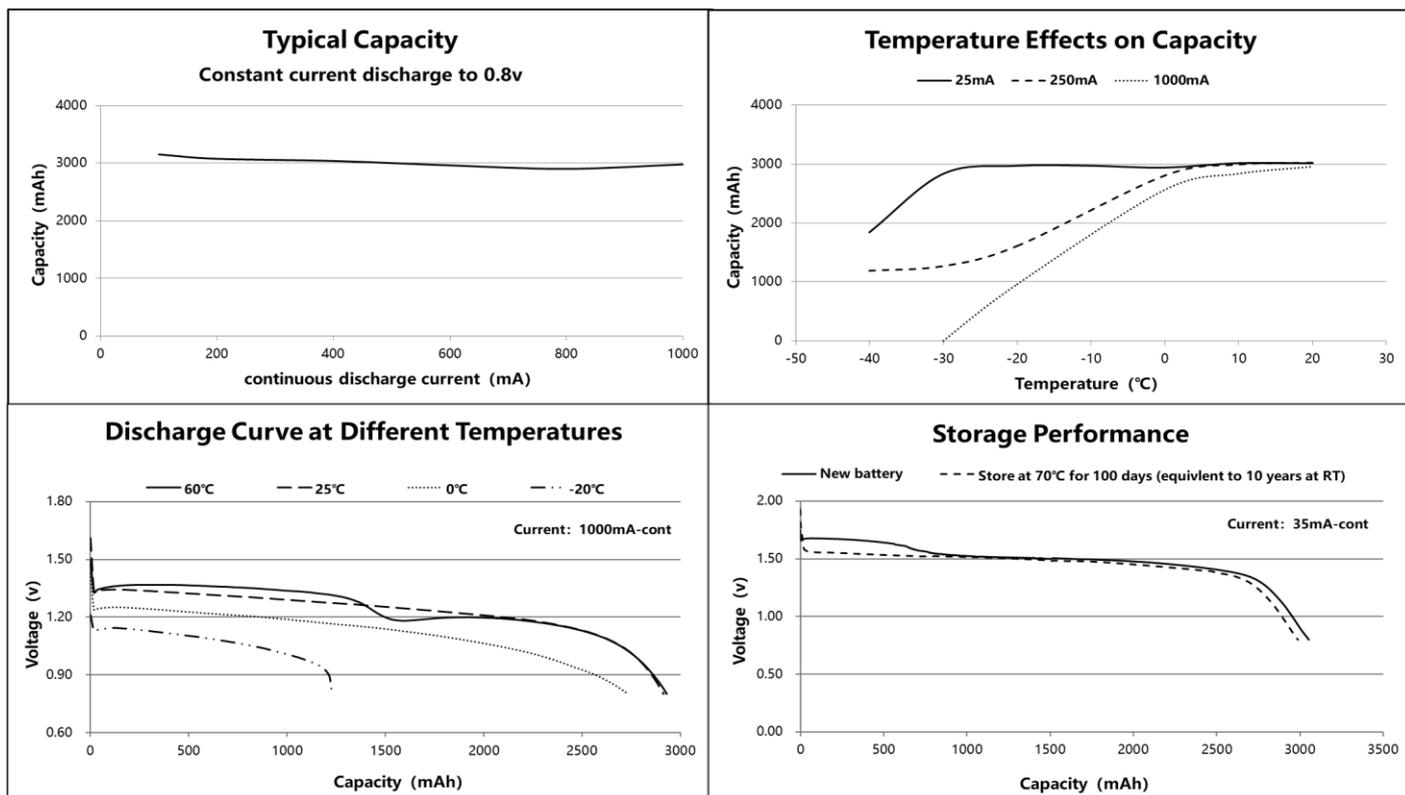

\*Please consult Huiderrui for use below and above -20°C to +60°C.

### Warning:

- Keep away from Children. If swallowed, promptly see doctor.
- Risk of fire, explosion, burning. Do not open battery, dispose of in fire, heat over 100°C (212°F). If expose damaged battery to water, recharge, put in backwards, mixed with used or other battery types-May explode or leak and cause personal injury.

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice.

Contact Huiderrui for the latest information.